

# PANORAMA SUNSET 15

Energy efficient Warm White light (3000K) with 79 CRI provides safety/multi-purpose lighting for many security/safety lighting applications.

## Performance

- Save 70% when retrofitting 70W metal halide fixtures with the 20.8W rectangular flood
- Built-in universal voltage drivers accept 100-277V AC input
- Broad horizontal beam angle offers wide coverage

## Construction


- UV resistant powder coating for outstanding corrosion protection and exposure to the elements.
- Tempered glass lens with molded gasket and silicone seal
- Swivel arms for precise placement

## Installation

- Designed for residential or light commercial use
- Combine neoprene gasket with field application of silicone at each arm attachment to ensure wet location rating (IP65)
- Can be mounted 4 feet or more above ground in areas such as eaves or roof lines lighting parking areas, walkways and surrounding areas
- Canopies have a 1/2"NPS threaded hole with plug for optional pencil photocell (sold separately)



## Photometrics

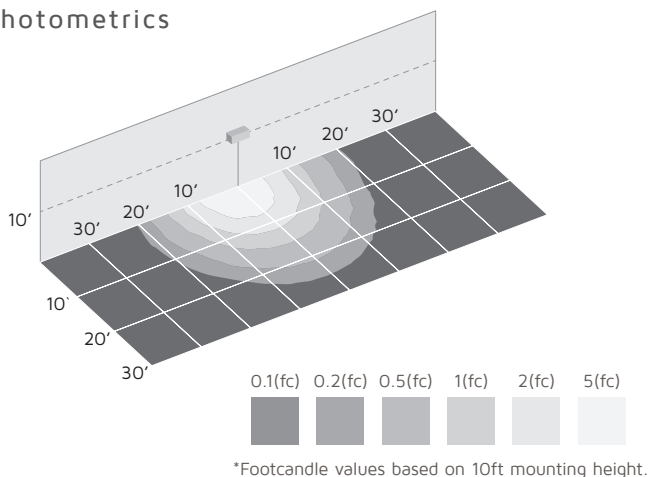

## Specifications

Series	ALV2-WF
Input voltage	100-277V AC
Color temperature	3000K
CRI	79+
Wattage	20.8W
Lumens	1320Lm
Beam angle	60° x 120°, 183° tilt
Housing	Die-cast coated aluminum
Lens	Tempered glass
Rating	c/UL/us Listed for wet locations
Dimensions	4.43"W(base) x 6.50"W x 4.43"H
Switching	Branch circuit
Mounting	4" round/octagonal junction box
LED type	COB (Chip on Board) LED
Rated life	50,000 hrs

## Panorama Sunset 15 & Accessories



**ALV2-WF-DB** (Dark Bronze)  
**ALV2-WF-WH** (White)  
 Panorama Sunset 15  
 3000K / 20.8W / 1320Lm



**AL-4C-DB**  
 4" extension arm  
 (Dark Bronze)



**AL-4C-WH**  
 4" extension arm  
 (White)



**PC-120** (120V AC)  
**PC-277** (208-277V AC)  
 Dusk to dawn pencil photocell  
 for 1/2" NPS hole